



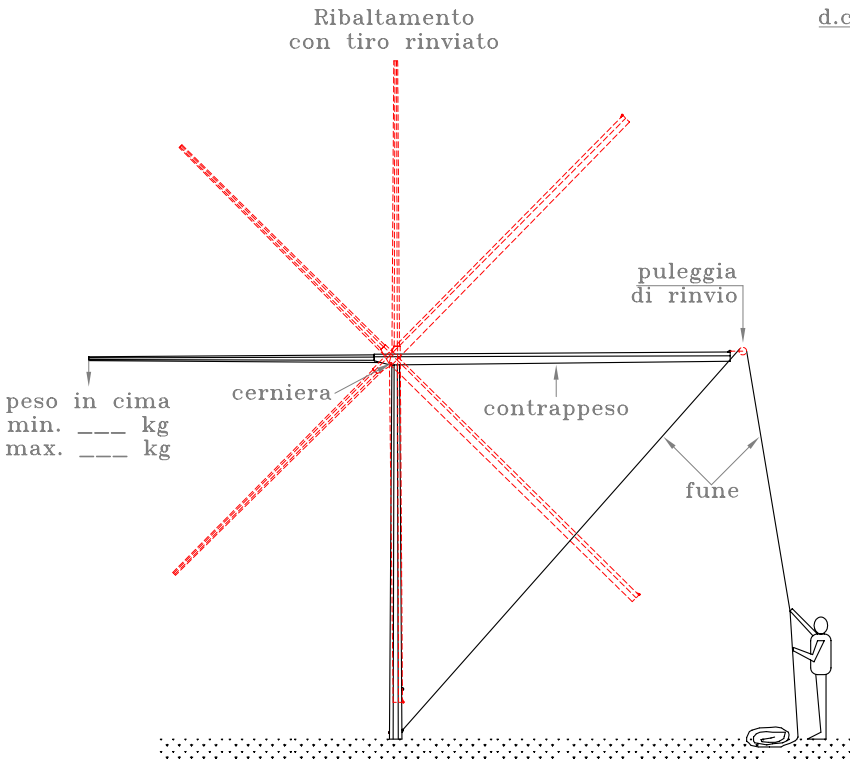

C08804RSB	=>	8800x148x60x4	-	kg	15/57
C016388RSB	=>	8800x163x75x4	-	kg	21/63
C09804RSB	=>	9800x158x60x4	-	kg	17/58
C017398RSB	=>	9800x173x75x4	-	kg	23/64
C010804RSB	=>	10800x168x60x4	-	kg	19/59
C0183108RSB	=>	10800x183x75x4	-	kg	26/66
C011804RSB	=>	11800x178x60x4	-	kg	20/60
C0193118RSB	=>	11800x193x75x4	-	kg	28/68
C012804RSB	=>	12800x188x60x4	-	kg	22/61
C0203128RSB	=>	12800x203x75x4	-	kg	31/70

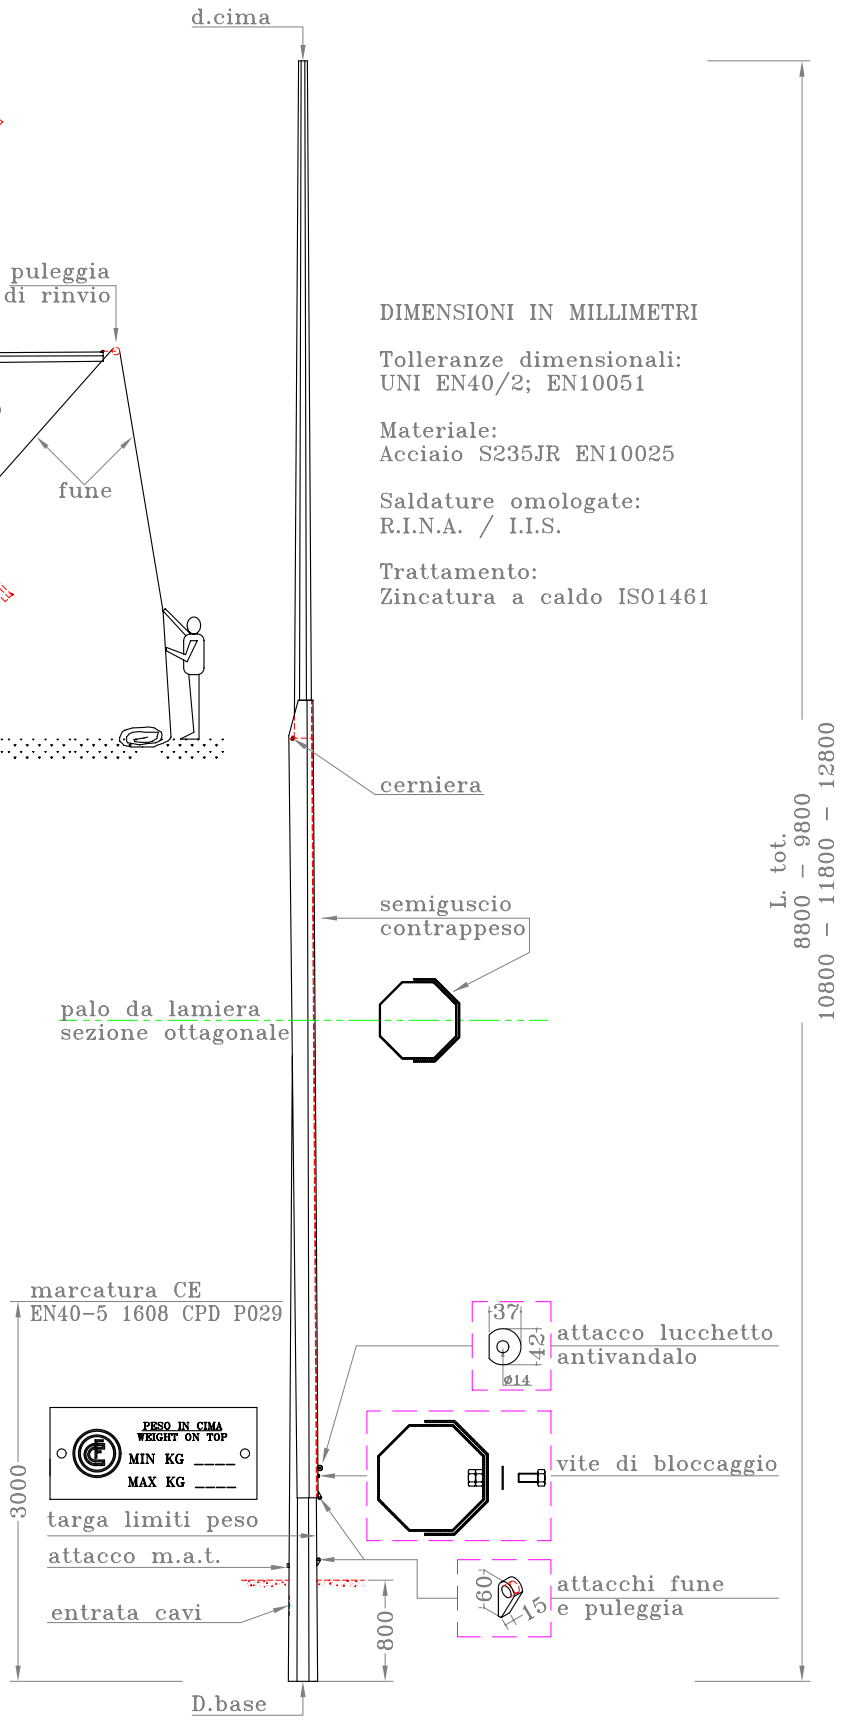

DIMENSIONI IN MILLIMETRI

Tolleranze dimensionali:
UNI EN40/2; EN10051

Materiale:
Acciaio S235JR EN10025

Saldature omologate:
R.I.N.A. / I.I.S.

Trattamento:
Zincatura a caldo ISO1461